


## DIMENSIONS AND SPECIFICATIONS

### Aspen Cased Upflow Coils

Designed for Ducane CMPA Furnaces

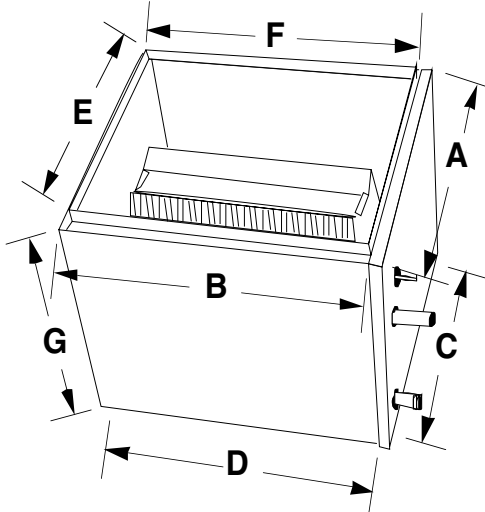

#### GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- One 3/4" MPT condensate drain.
- Powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
CMPA050U3 CMPA075U3	BVR** 24	A6A12	14	22-1/8	12	20-5/8	12-1/2	20-5/8	12
	BVR** 30	A6A18	14	22-1/8	12	20-5/8	12-1/2	20-5/8	18
	BVR** 36	A6A18	14	22-1/8	12	20-5/8	12-1/2	20-5/8	18
	BV5** 36	A6A18	14	22-1/8	12	20-5/8	12-1/2	20-5/8	18
CMPA100U4	BVR** 36	A6B20	17	22-1/8	15-1/4	20-5/8	15-1/2	20-5/8	20
	BV5** 36	A6B20	17	22-1/8	15-1/4	20-5/8	15-1/2	20-5/8	20
	BVR** 42	A6B20	17	22-1/8	15-1/4	20-5/8	15-1/2	20-5/8	20
	BVR** 48	A6B20	17	22-1/8	15-1/4	20-5/8	15-1/2	20-5/8	20
	BV1** 60	A6B26	17	22-1/8	15-1/4	20-5/8	15-1/2	20-5/8	26
	BV7** 60	A6B26	17	22-1/8	15-1/4	20-5/8	15-1/2	20-5/8	26
CMPA125U5	BVR** 48	A6C20	20-1/2	22-1/8	18-3/4	20-5/8	19	20-5/8	20
	BV1** 60	A6C26	20-1/2	22-1/8	18-3/4	20-5/8	19	20-5/8	26
	BV7** 60	A6C26	20-1/2	22-1/8	18-3/4	20-5/8	19	20-5/8	26
	BV2** 60	A6D26	20-1/2	23	18-3/4	20-5/8	19	21-1/2	26