


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for Lennox G24M or 80MGF Multi-Position Furnaces

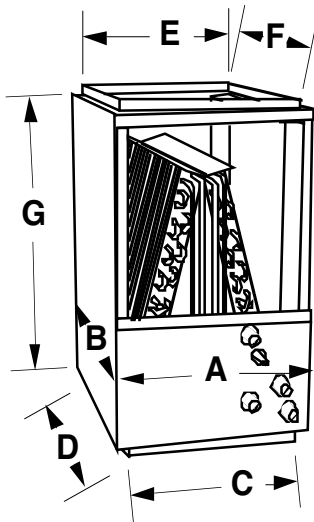

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Right-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

LENNOX FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT G
			A	B	C	D	E	F	
G24M2-45, -60, -75, M3-60, -75, M4-75 80MGF2-45, -60, -75, F3-60, -75, F4-75	BV1** 18	BNR17	17	21-1/4	15-1/4	19-3/4	13-1/4	18-1/4	17
	BV1** 24	BNR17	17	21-1/4	15-1/4	19-3/4	13-1/4	18-1/4	17
	BV1** 30	BNR21	17	21-1/4	15-1/4	19-3/4	13-1/4	18-1/4	21
	BV1** 36	BNR25	17	21-1/4	15-1/4	19-3/4	13-1/4	18-1/4	25
	BV1** 42	BNR25	17	21-1/4	15-1/4	19-3/4	13-1/4	18-1/4	25
	BV5** 42	BNR25	17	21-1/4	15-1/4	19-3/4	13-1/4	18-1/4	25
	BV7** 60	BNR29	17	21-1/4	15-1/4	19-3/4	13-1/4	18-1/4	29
G24M3/4-100, -120, M4/5-100, -120 80MGF3/4-100, -120 4/5-100, -120	BV1** 24	BNS17	20-1/2	21-1/4	18-3/4	19-3/4	16-3/4	18-1/4	17
	BV1** 30	BNS21	20-1/2	21-1/4	18-3/4	19-3/4	16-3/4	18-1/4	21
	BV1** 36	BNS25	20-1/2	21-1/4	18-3/4	19-3/4	16-3/4	18-1/4	25
	BV1** 42	BNS25	20-1/2	21-1/4	18-3/4	19-3/4	16-3/4	18-1/4	25
	BV1** 48	BNS29	20-1/2	21-1/4	18-3/4	19-3/4	16-3/4	18-1/4	29
	BVR** 48	BNS25	20-1/2	21-1/4	18-3/4	19-3/4	16-3/4	18-1/4	25
	BV1** 60	BNS29	20-1/2	21-1/4	18-3/4	19-3/4	16-3/4	18-1/4	29
	BV2** 60	BNJ29	20-1/2	23	18-3/4	19-3/4	16-3/4	18-1/4	29
G24M4/5-140 80MGF4/5-140	BV1** 48	BNT29	23-1/4	21-1/4	21-1/2	19-3/4	19-1/2	18-1/4	29
	BVR** 48	BNT25	23-1/4	21-1/4	21-1/2	19-3/4	19-1/2	18-1/4	25
	BV1** 60	BNT29	23-1/4	21-1/4	21-1/2	19-3/4	19-1/2	18-1/4	29
	BV7** 60	BNT29	23-1/4	21-1/4	21-1/2	19-3/4	19-1/2	18-1/4	29
	BV2** 60	BNW29	23-1/4	23	21-1/2	19-3/4	19-1/2	18-1/4	29

Note: Furnace top flanges must be bent up completely. Furnace bottom flanges should remain flat.