




PRODUCT DIMENSIONS & SPECIFICATIONS

DX-TREME CM SERIES UNCASED DOWNFLOW COILS FOR USE WITH MANUFACTURED HOME FURNACES

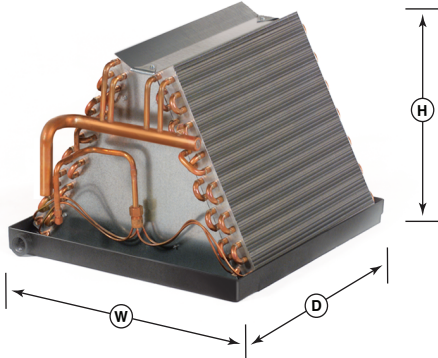

Representative picture only. Some models may vary in appearance.

STANDARD SPECIFICATIONS

- Riffled copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Left-hand refrigerant and plumbing connections.
- Liquid line - 3/8" ODS, suction line - 3/4" ODS on 1-1/2- 3 ton & 7/8" ODS on 3-1/2 - 5 ton.
- Liquid line Schrader valve for hiss-testing.
- Heavy duty polypropylene drain pans.
- Drain connection: 177L pans have single LH 3/4" MPT, 195L pan have quad drains, 3/4" MPT.
- Condensate drain elbow and flexible drain tubing included.
- Downflow plate kit included.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with both R-22 and R-410a when proper metering device is used.
- Ten-year limited warranty.

AVAILABLE OPTIONS:

- Factory or field-installable TXV.
- Schrader mounted on suction manifold.

COIL MODEL	PISTON SIZE		DIMENSIONS			SHIPPING INFORMATION			
			PAN WIDTH (W)	PAN DEPTH (D)	BARE SLAB HEIGHT (H)	SHIPPING WEIGHT			SKID QTY
	R22	R410				2 ROW	3 ROW	4 ROW	
CM24A(2,3)*-177L	0.059	0.055	17-3/4	19-5/8	13-1/2	17	27	N/A	30
CM24B(2,3)*-177L	0.059	0.055	17-3/4	19-5/8	15-1/2	20	31	N/A	25
CM24C(2,3)*-177L	0.059	0.055	17-3/4	19-5/8	17-1/2	23	36	N/A	25
CM24D(2,3)*-177L	0.059	0.055	17-3/4	19-5/8	19-1/2	25	40	N/A	20
CM30A(2,3)*-177L	0.068	0.059	17-3/4	19-5/8	15-1/2	20	31	N/A	25
CM30B(2,3)*-177L	0.068	0.059	17-3/4	19-5/8	17-1/2	23	36	N/A	25
CM30C(2,3)*-177L	0.068	0.059	17-3/4	19-5/8	19-1/2	25	40	N/A	20
CM36A(2,3)*-177L	0.074	0.068	17-3/4	19-5/8	17-1/2	23	36	N/A	25
CM36B(2,3)*-177L	0.074	0.068	17-3/4	19-5/8	19-1/2	25	40	N/A	20
CM42A(2,3)*-177L	0.080	0.074	17-3/4	19-5/8	19-1/2	25	40	N/A	20
‡ CM48A3*-177L	0.084	0.080	17-3/4	19-5/8	21-1/2	N/A	45	N/A	16
‡ CM48A4*-195L	0.084	0.080	19-1/2	19-3/8	21-1/2	N/A	N/A	58	16
‡ CM48B3*-177L	0.084	0.080	17-3/4	19-5/8	23-1/2	N/A	49	N/A	12
‡ CM48B4*-195L	0.084	0.080	19-1/2	19-3/8	23-1/2	N/A	N/A	64	12
‡ CM48C3*-177L	0.084	0.080	17-3/4	19-5/8	25-1/2	N/A	54	N/A	12
‡ CM48C4*-195L	0.084	0.080	19-1/2	19-3/8	25-1/2	N/A	N/A	70	12
‡ CM48D3*-177L	0.084	0.080	17-3/4	19-5/8	27-1/2	N/A	58	N/A	12
‡ CM48D4*-195L	0.084	0.080	19-1/2	19-3/8	27-1/2	N/A	N/A	76	12
CM48E3*-177L	0.084	0.080	17-3/4	19-5/8	19-1/2	N/A	40	N/A	20
‡ CM60A(3,4)*-195L	0.092	0.089	19-1/2	19-3/8	25-1/2	N/A	54	70	12
‡ CM60B(3,4)*-195L	0.092	0.089	19-1/2	19-3/8	27-1/2	N/A	58	76	12

Notes:

Do not use heavy duty polypropylene drain pans on oil furnaces or other applications where outlet temperatures may exceed 300°F. Specify metal drain pans for these applications.

‡ These coils are intended to be mounted on top of the furnace, not inside the furnace cavity.

() number of rows available

* Metering devices available - F = R22 florater; X = R22 TXV; 4 = R410a TXV; G = R410a florater

800-423-9007
ASPENMFG.COM

R-410a
READY



ASSEMBLED
IN THE USA

EVERYTHING'S
RIGHT HERE™