


ASPENPRO CASED & UNCASD

PAS/T SERIES CEILING MOUNT

ELECTRIC HEAT DX COOL AIR HANDLER

FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS



Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

WARRANTY

ONE YEAR LIMITED
PARTS WARRANTY

DIRECT EXPANSION COIL

High efficiency rifled copper tubes/enhanced aluminum fins provide maximum heat transfer. All coils immersion tested at 500 psi then nitrogen pressurized and factory sealed for maximum reliability. Liquid-line Schrader allows pre-installation pressure testing. Available with either orifice or TXV metering device factory installed. Field-installable bolt-on TXVs are also available. Primary & secondary condensate drain. All drain connections are 3/4" MPT. Powder-painted metal drain pan. Access door allows for coil cleaning.

- ETL listed for use with R-22, R-410A, R-454B, and R-32 when a proper metering device is used.
- In accordance to UL 60335 Refrigerant Detection Systems are field-installed on A2L refrigerant ready.

APPLICATION VERSATILITY

Built in mounting tabs for ceiling or fur-down mounting. Louvered ceiling access panel has separate frame that attaches to ceiling joists. Solid access panel available for use with end return installations. Compatible with most brands of air conditioners or heat pumps. Field convertible front and bottom return. Wall hanging bracket included standard.

MOTOR

Direct drive multi-speed blowers circulate air quietly and efficiently. Two speed motors allow for precise air volume selection. Motor speeds can be easily selected via motor terminals. Blowers mounted on plate so they can be easily removed for service.

ELECTRONIC CONTROL BOARD

Electronic circuit board provides 30 secs ON/OFF blower time delay extracting more heat/cool from the coil.

ELECTRIC HEAT KITS

Heat kits available in 3, 5, 6, 8, & 10 KW. Models with electric heat include sequencers and temperature limit switches for safe, efficient operation. Easily accessible controls for quick service.

LOW LEAKAGE CABINET

Less than 2% air leakage from cabinet when installed in enclosure and tested in accordance with ASHRAE 193.

- **PAS SERIES:** Sturdy, fully insulated galvanized enclosure with ducted return available as option.
- **PAT SERIES:** Sturdy, fully insulated galvanized steel cabinet with knockout for duct return.



WANT MORE INFORMATION ON THE ASPENPRO PAS/T SERIES CEILING MOUNT AIR HANDLERS?

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE

For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website. To view this coil's product information online for the most up-to-date information scan the QR Code.

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website.

AP-PAS-PAT-Spec-2025-03



PA(S/T) SERIES - HEATING/COOLING PERFORMANCE & ELECTRICAL DATA											
MODEL	PERFORMANCE DATA							ELECTRICAL DATA			
	NOM. COOL. (BTU)	ELECT. HEAT KIT MODEL	MIN. SPEED TAP	HEATING (KW)		TOT. AMPS (A)		MIN. CIRCUIT AMPACITY (MCA2)		MAX. BREAKER OR FUSE SIZE (MEU2)	
				208V	240V	208V	240V	208V	240V	208V	240V
PA(S/T) 23	18,000	HTS00P	-	0.0	0.0	1.4	1.4	1.8	1.8	15A	15A
		HTS03P	LO	2.3	3.0	12.2	13.9	15.3	17.4	20A	20A
		HTS05P	LO	3.6	4.8	18.7	21.4	23.4	26.8	25A	30A
		HTS06P	LO	4.5	6.0	23.0	26.4	28.8	33.0	30A	35A
		HTS08P	HI	6.0	8.0	30.2	34.7	37.8	43.4	40A	45A
		HTS10P	HI	7.2	9.6	36.0	41.4	45.0	51.8	45A	60A
PA(S/T) 26/27	24,000	HTS00P	-	0.0	0.0	1.4	1.4	1.8	1.8	15A	15A
		HTS03P	LO	2.3	3.0	12.2	13.9	15.3	17.4	20A	20A
		HTS05P	LO	3.6	4.8	18.7	21.4	23.4	26.8	25A	30A
		HTS06P	LO	4.5	6.0	23.0	26.4	28.8	33.0	30A	35A
		HTS08P	HI	6.0	8.0	30.2	34.7	37.8	43.4	40A	45A
		HTS10P	HI	7.2	9.6	36.0	41.4	45.0	51.8	45A	60A
PA(S/T) 28/29	24,000	HTM00P	-	0.0	0.0	2.15	2.15	2.7	2.7	15A	15A
		HTM03P	LO	2.3	3.0	13.0	14.7	16.2	18.3	20A	20A
		HTM05P	LO	3.6	4.8	19.5	22.2	24.3	27.7	25A	30A
		HTM06P	LO	4.5	6.0	23.8	27.2	29.7	33.9	30A	35A
		HTM08P	HI	60.0	8.0	31.0	35.5	38.7	44.4	40A	45A
		HTM10P	HI	7.2	9.6	36.8	42.2	46.0	52.7	50A	60A
PA(S/T) 31/34/35	30,000	HTM00P	-	0.0	0.0	2.15	2.15	2.7	2.7	15A	15A
		HTM03P	LO	2.3	3.0	13.0	14.7	16.2	18.3	20A	20A
		HTM05P	LO	3.6	4.8	19.5	22.2	24.3	27.7	25A	30A
		HTM06P	LO	4.5	6.0	23.8	27.2	29.7	33.9	30A	35A
		HTM08P	HI	60.0	8.0	31.0	35.5	38.7	44.4	40A	45A
		HTM10P	HI	7.2	9.6	36.8	42.2	46.0	52.7	50A	60A
PA(S/T) 38	36,000	HTM00P	-	0.0	0.0	2.15	2.15	2.7	2.7	15A	15A
		HTM03P	LO	2.3	3.0	13.0	14.7	16.2	18.3	20A	20A
		HTM05P	LO	3.6	4.8	19.5	22.2	24.3	27.7	25A	30A
		HTM06P	LO	4.5	6.0	23.8	27.2	29.7	33.9	30A	35A
		HTM08P	HI	60.0	8.0	31.0	35.5	38.7	44.4	40A	45A
		HTM10P	HI	7.2	9.6	36.8	42.2	46.0	52.7	50A	60A

PA(S/T) SERIES - BLOWER DATA														
MODEL	SPEED TAP	MOTOR			CFM VS. EXTERNAL STATIC (DRY COIL)									
		HP	FLA	VOLT.	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
PA(S/T) 18/19/24	HIGH	1/4	1.4	240V	895	840	780	715	645	540	430	210	190	-
	LOW				750	705	660	610	535	400	320	150	-	-
PA(S/T) 20/25	HIGH	1/4	1.4		1015	955	890	830	755	665	550	325	260	-
	LOW				785	740	700	650	590	505	350	260	100	-

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. AP-PAS-PAT-Spec-2025-03

PA(S/T) SERIES - BLOWER DATA - CONTINUED

MODEL	SPEED TAP	MOTOR			CFM VS. EXTERNAL STATIC (DRY COIL)									
		HP	FLA	VOLT.	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
PA(S/T) 26/31/36	HIGH	1/3	2.15	240V	1035	965	890	810	720	520	445	-	-	-
	LOW				875	810	740	670	580	460	-	-	-	-
PA(S/T) 28/32/37	HIGH	1/3	2.15		1155	1075	1010	930	850	765	675	340	340	-
	LOW				960	900	840	770	700	615	500	210	105	-
PA(S/T) 30	HIGH	1/3	2.15		1130	1055	985	915	835	750	645	515	345	-
	LOW				930	875	820	760	700	620	520	370	115	-

PA(S/T) AIR HANDLER CHASSIS NOMENCLATURE (ELECTRIC CEILING MOUNT)

P	A	S/T	23	4/J	-000
ASPEN PRO	VOLT. 240V PSC MOTOR ELECTRIC AIR HANDLER	CONFIGUR. S = Uncased Ceiling Mount T = Cased Ceiling Mount	NOMINAL TONNAGE (MBTUH)	A1 METERING DEVICE 4 = R410A (TXV NON-BLEED A/C or H/P) X = R22 (TXV NON-BLEED A/C or H/P) B = R22 (TXV 20% BLEED A/C or H/P) F = R22 (PISTON) G = R410A (PISTON)	OPTION CODE
				A2L METERING DEVICE J = R454B (TXV NON-BLEED A/C or H/P) K = R454B (TXV 20% BLEED A/C or H/P) D = R32 (TXV NON-BLEED A/C or H/P) M = R32 (PISTON) N = R454B (PISTON)	

ELECTRIC HEAT NOMENCLATURE

H	T	S	10
ELECTRIC HEAT	INTERRUPTION T = TERMINAL BLOCK	CABINET SIZE & NOM. TONNAGE M = MEDIUM CABINET (18-37) S = SMALL CABINET (18-37)	HEAT STRIP 00 = 0 KW 06 = 6 KW 03 = 3 KW 08 = 8 KW 05 = 5 KW 10 = 10 KW

ACCESS DOOR

VERSATILITY

Equipped with hidden frame feature. Fastens to the outside wall surface and does not have to perfectly match the hole opening. Frame screws are not visible after installation. Available in either solid (S) or Louvered (L) style.

MATERIALS

Galvanized steel construction with smooth powder paint finish.

FILTER

20" x 20" x 1" field supplied.


PA(S/T) - ACCESS DOOR DIMENSIONS (In. [mm]) - FIGURE 1

PANEL MODEL	FOR USE WITH	PAT ACCESS DOOR AND FRAME				FILTERS (QTY)
		A	B	C	D	
PA(S/T)23/26	GAD-1(S/L)	43-1/2	27-1/2	41-1/2	26	1
PA(S/T)27	GAD-5(S/L)	49-1/2		47-1/2		2
PA(S/T)28/29/34	GAD-2(S/L)	55-1/2		53-1/2		2
PA(S/T)33/35/38	GAD-6(S/L)	63-1/2		61-1/2		2





FIGURE 1

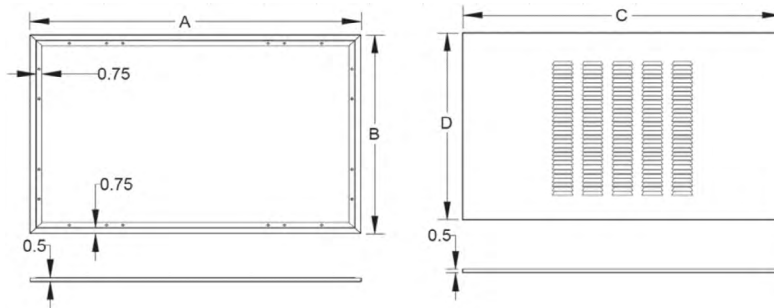


PAT SERIES - CAP KIT PART NUMBER (In.)		
ASPENPRO MODEL	PART NUMBER	ENCLOSURE SIZE
PAT23	CAP-1	40X24X11
PAT27/31	CAP-2	46X24X11
PAT29/34	CAP-3	52X24X11
PAT36/38	CAP-4	60X24X11

NOTE: CAP kit is an insulated panel that covers the entire bottom opening and is utilized for optional ducted return configuration.

PA(S/T) - CHASSIS DIMENSIONS (In. [mm]) - FIGURE 2

ASPENPRO MODEL	A	B	C	D	WEIGHT (LBS)	SKID QTY
PA(S/T)23/26	37-1/4 [946]	34-5/8 [879]	42 [1060]	36.375 [924]	85	8
PA(S/T)27/31	43-1/4 [1099]	40-5/8 [1032]	36 [914]	42-5/8 [1083]	90	
PA(S/T)28/29/34	49-1/4 [1251]	46-5/8 [1184]	42 [1060]	52 [1321]	100	
PA(S/T)33/35/38	56-1/4 [1429]	53-5/8 [1362]	48 [1219]	54 [1372]	110	


FIGURE 2

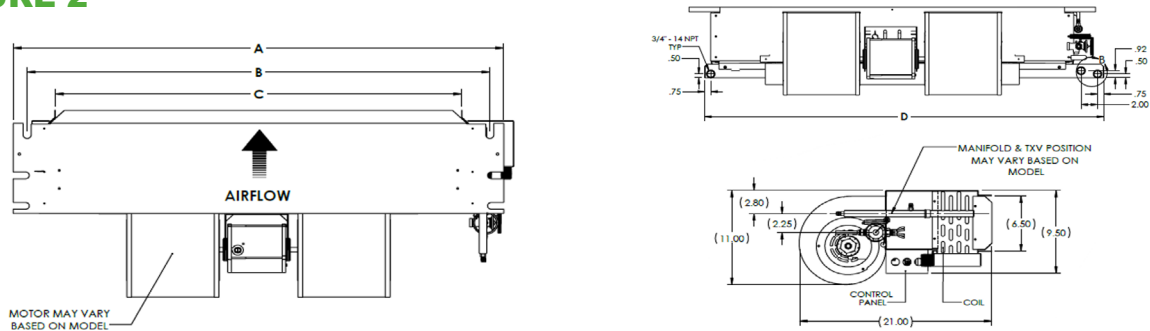

PA(S/T) - ENCLOSURE DIMENSIONS (In. [mm]) - FIGURE 3

ASPENPRO MODEL	A	B	C	WEIGHT (LBS)	SKID QTY
PA(S/T)23/26	40 [1016]	30 [762]	30 [762]	125	5
PA(S/T)27/31	46 [1168]	36 [914]	36 [914]	135	
PA(S/T)28/29/34	52 [1321]	42 [1067]	42 [1067]	145	
PA(S/T)33/35/38	60 [1524]	48 [1219]	48 [1219]	155	

FIGURE 3

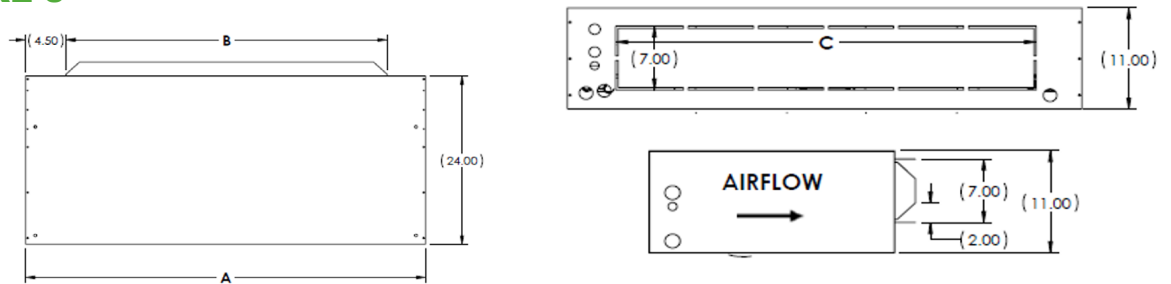

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. WWW.ASPENMFG.COM