




# CH SERIES COILS

## COPPER SLAB HORIZONTAL

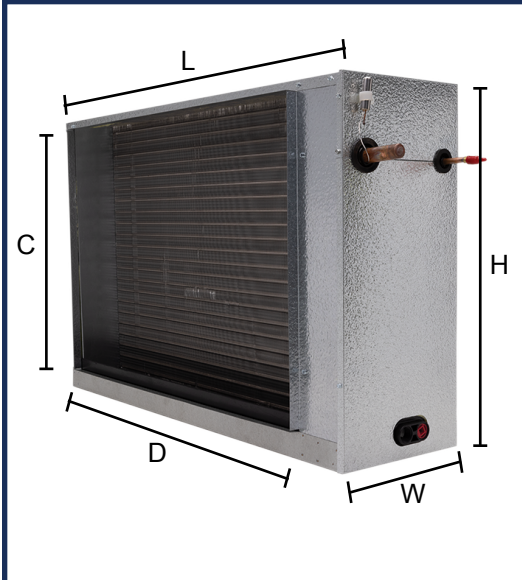

Representative image only. Some models may vary in appearance.

### STANDARD FEATURES

- Rifled copper tubing, enhanced aluminum fins.
- Immersion tested at 500 psi, followed by nitrogen pressurization and factory sealing to ensure optimal system integrity and long-term reliability.
  - Schrader provided for pressure assurance testing with 3/8" ODS Stem mounted on end of Liquid Line
- Refrigerant and plumbing connections.
  - **Liquid line:** 3/8" ODS
  - **Suction line:**
    - ▶ 3/4" ODS on 1-1/2-ton to 3-ton
    - ▶ 7/8" ODS on 3-1/2-ton to 5-ton
  - **Condensate Drains:** 3/4" NPT
- Fully insulated cabinets with faced insulation. Split access doors in front of cabinet for easy service access.
- AHRI certifiable with all brands of A/C and heat pump systems.
- A2L refrigerants require a Refrigerant Detection System (RDS) for compliance.
- ETL listed for R22 and R410A. ETL listed for R454B and R32 with Refrigerant Detection System (RDS).

### WARRANTY

- Ten-year limited warranty with registration.

### CUSTOMIZATION OPTIONS\*

#### UNIVERSAL A2L REFRIGERANT TECHNOLOGY FOR R32 & R454B SYSTEMS



#### IDEAL FOR USE WITH BOTH CASSED AND UNCASSED COILS, PLUS ALL AIR HANDLERS!

Versa Pro coils are easily configurable for use with either R32 or R454B refrigerant with proper metering device. Utilizing universal Refrigerant Detection Systems (RDS) to ensure regulatory compliance.

#### OTHER POPULAR CUSTOM OPTIONS:

- Factory or field-installed TXV available.

#### DOWNFLOW KIT OPTIONS:

##### METAL DRAIN PANS

- 16" DWNFLWM-16
- 18" DWNFLWM-18

##### PLASTIC DRAIN PANS

- DWNFLWP

CH-SS-C-009-A



R-410A • R-22 • R-454B • R-32  
REFRIGERANT READY  
WHEN PROPER METERING DEVICE IS USED



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

PERFORMANCE & DIMENSIONAL DATA (In.)													
COIL MODEL	NOM. CAPACITY	CONNECTIONS		FLOWRATOR SIZE	DIMENSIONS					SHIPPING INFO.			
		LIQ. LINE	SUCT. LINE		CABINET			OPENING		WEIGHT (LBS)			SKID QTY
	BTU	OD	OD	R-410A	H"	W"	L"	C"	D"	2	3	4	
CH24A*	24,000	3/8	3/4	0.055	23-1/2	10	21-1/2	21	16	20	34	-	14
CH24B*		3/8	3/4	0.055	23-1/2	10	29-1/2	21	24	29	43	-	14
CH36A*	36,000	3/8	3/4	0.068	23-1/2	10	29-1/2	21	24	29	43	-	14
CH36B*		3/8	3/4	0.068	23-1/2	10	35-1/2	21	30	35	49	-	14
CH48A*	48,000	3/8	7/8	0.080	23-1/2	10	35-1/2	21	30	35	49	-	14
CH48B*		3/8	7/8	0.080	23-1/2	10	41-1/2	21	36	42	56	-	8
CH60A*	60,000	3/8	7/8	0.089	23-1/2	10	41-1/2	21	36	-	56	70	8
CH60B*		3/8	7/8	0.089	23-1/2	10	47-1/2	21	42	-	66	80	8

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMPERATURE LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

**HELPFUL LINKS**



**VIEW PRODUCT ONLINE**

*For full warranty terms and conditions, please refer to the Warranty Information section on Aspen's official website.*



**VIEW VERSA PRO ONLINE**

*Learn more about Aspen's A2L Refrigerant Technology for R32 and R454B Systems.*

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved