




# CR SERIES

## COPPER DEDICATED HORIZONTAL PLENUM COIL WITH BUILT-IN AUXILIARY DRAIN PAN EVAPORATOR COIL

### FEATURES, DIMENSIONS, & SPECIFICATIONS

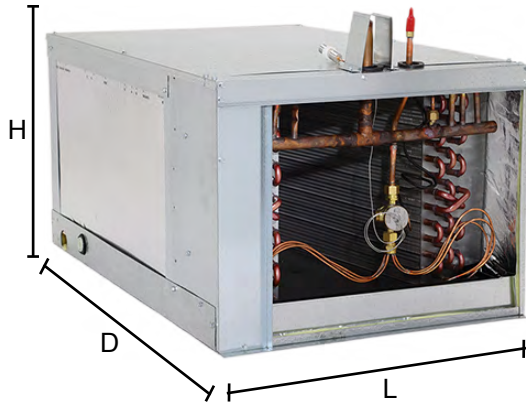

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

### FEATURES AND BENEFITS:

- Rifled aluminum tubing, enhanced aluminum fins.
- Refrigerant and plumbing connections:
  - Liquid line - 3/8" ODS
  - Suction line - 3/4" ODS on 1.50 3-ton and 7/8" on 3.50-ton to 5-ton.
- Refrigerant lines exit from the top of the coil with Schrader valve for hiss-testing.
- Three-piece access doors on top of the coil for easy service.
- Fully insulated cabinet with plenum sides and back constructed of foil-backed, faced, one-inch thick, fiberglass duct-board.
- Air pressure tested at 500 psi, leak tested with Helium, then sealed and Nitrogen-pressurized.
- Heavy duty plastic pan with 4.75" NPT condensate drains on each side of the coil.
- Secondary metal drain pan included with one inch spacing around the cabinet for turnkey installation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-410A, R-454B, R-22, and R-32 when proper metering device is used.
- Ten-year limited warranty.



### WANT MORE INFORMATION ON ASPEN'S CR SERIES EVAPORATOR COILS?

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE



*For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website. To view this coil's product information online for the most up-to-date information scan the QR Code.*

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CR Spec-2025-03

# SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOM. CAPACITY (BTUs)	DIMENSIONS			SHIPPING INFORMATION			
		CABINET			SHIPPING WEIGHT (LBS)			SKID QTY
		WIDTH (W)	DEPTH (D)	HEIGHT (H)	2 ROW	3 ROW	4 ROW	
CR24A*	24,000	20-1/2	31	15-1/2	42	51	N/A	8
CR24B*			31	19-1/2	47	56		
CR24C*			31	23-1/2	57	69		
CR30A*	30,000		31	15-1/2	48	58		
CR30B*			31	19-1/2	47	56		
CR30C*			31	23-1/2	57	69		
CR36A*	36,000		31	15-1/2	55	66		
CR36B*			31	19-1/2	55	66		
CR36C*			31	23-1/2	57	69		
CR36D*			40	19-1/2	93	112		
CR36E*			31	21-1/2	62	75		
CR42A*	42,000		40	19-1/2	62	75		
CR42B*			40	23-1/2	57	80		
CR42C*			40	25-1/2	62	75		
CR48A*	48,000		40	23-1/2	76	92		
CR48B*			40	25-1/2	73	87		
CR48C*		40	25-1/2	93	112	135		
CR60A*	60,000	40	23-1/2	124	149	N/A		
CR60B*		40	25-1/2	125	150			

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CR Spec-2025-03

