


DR SERIES

ALUMINUM DEDICATED HORIZONTAL PLENUM COIL WITH BUILT-IN AUXILIARY DRAIN PAN

FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

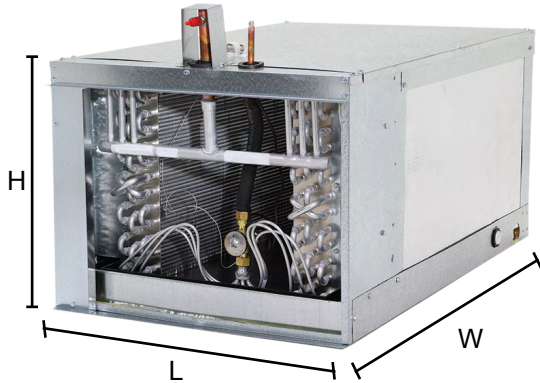

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

FEATURES AND BENEFITS:

- Rifled aluminum tubing, enhanced aluminum fins.
- Air pressure tested at 500 psi, leak tested with Helium, then Nitrogen-pressurized and sealed.
- Refrigerant and plumbing connections:
 - Liquid line - 3/8" ODS
 - Suction line - 3/4" ODS on 1.50 3-ton and 7/8" on 3.50-ton to 5-ton.
- Externally mounted flowrater body or internally mounted factory-installed TXV.
- Schrader valve on liquid line for hiss-testing.
- Refrigerant lines exit top of coil.
- Split access doors in front of cabinet for easy service access.
- Plastic drain pans (primary and secondary).
- Built-in auxiliary drain pan with 3/4" FPT.
- Plenum sides and end constructed of foil-backed faced fiberglass duct-board. Plenum top and bottom constructed of galvanized steel.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454A, and R-32 when proper metering device is used.
- Patented design (Patent No. 8,869,548 B2).
- Ten-year limited warranty with registration.



For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website. To view this coil's product information online for the most up-to-date information scan the QR Code.

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. DR Spec-2025-03

SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOM. CAPACITY (BTUs)	DIMENSIONS					SHIPPING INFORMATION			
		CABINET			INSIDE		WEIGHT (LBS)			SKID QTY
		LENGTH (L)	WIDTH (W)	HEIGHT (H)	WIDTH	HEIGHT	2 ROW	3 ROW	4 ROW	
DR24A*	24,000	20-1/2	31	15-1/2	19.25	14	27	33	N/A	16
DR24B*				19-1/2		18	31	36		16
DR24C*				23-1/2		22	37	45		16
DR24D*				19-1/2		18	42	51		16
DR30A*	30,000			15-1/2		14	31	38		16
DR30B*				19-1/2		18	31	36		16
DR30C*				23-1/2		22	37	45		16
DR30D*				19-1/2		18	42	51		16
DR36A*	36,000		15-1/2	14		36	43	16		
DR36B*			19-1/2	18		36	43	16		
DR36C*			23-1/2	22		37	45	12		
DR36D*			19-1/2	18		60	73	16		
DR42A*	42,000		19-1/2	18		40	49	16		
DR42B*			23-1/2	22		44	52	12		
DR42C*			25-1/2	24		40	49	12		
DR42D*			23-1/2	22		52	62	12		
DR48A*	48,000	23-1/2	22	49	60	12				
DR48B*		25-1/2	24	47	57	12				
DR48C*		25-1/2	24	60	73	89	12			
DR48D*		23-1/2	22	59	72	12				
DR60A*	60,000	23-1/2	22	81	97	N/A	12			
DR60B*		25-1/2	24	81	98		12			
DR60C*		25-1/2	24	85	101		12			

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. DR Spec-2025-03

