


CA SERIES

UNCASED COPPER UPFLOW/ DOWNFLOW EVAPORATOR COIL

FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

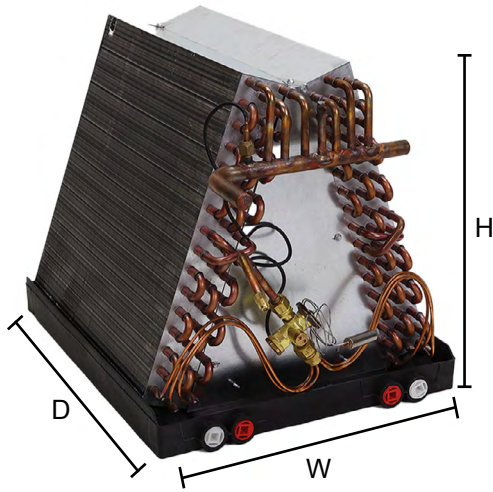

Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

FEATURES AND BENEFITS:

- Rifled copper tubing, enhanced aluminum fins.
- Left or right-hand refrigerant and plumbing connections.
- Standard refrigerant connections:
 - Liquid line - 3/8" ODS
 - Suction line - 3/4" ODS on 1.50 3-ton and 7/8" on 3.50-ton to 5-ton.
- Externally mounted flowrater body with Schrader valve for hiss-testing.
- Heavy gauge plastic drain pans on most models.
- Immersion-tested at 500 psi, then Nitrogen-pressurized and sealed.
- Upflow without field modification. Downflow applications require plate kit, sold separately.
- AHRI certifiable with all brands of A/C and heat pump systems (BHA only).
- ETL listed for use with R-410A, R-454B, and R-32 when proper metering device is used.
- Ten-year limited warranty.

CUSTOMIZATION

- Factory or field-installed TXV available.
- Powder-painted metal or stainless pans.
- Schrader mounted on suction manifold, external to cabinet.

DOWNFLOW KIT PARTS

METAL DRAIN PANS:

- 16" DWNFLWM-16
- 18" DWNFLWM-18

PLASTIC DRAIN PANS:

- DWNFLWP



**WANT MORE INFORMATION ON ASPEN'S
CA SERIES EVAPORATOR COILS?**

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE



*For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website.
To view this coil's product information online for the most up-to-date information scan the QR Code.*

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CA Spec-2025-03

SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOM. CAPACITY (BTU)	PAN SIZE					SHIPPING INFO.				
		WIDTH (W)				DEPTH (D)	BARE SLAB HEIGHT (H)	WEIGHT (LBS)			SKID QTY
		13	16	19-1/2	23			2 ROW	3 ROW	4 ROW	
CA24A*	24,000	13	16	19-1/2	N/A	19-3/8	13-1/2	17	27	35	30
CA24B*		13	16	19-1/2	N/A		15-1/2	20	31	41	25
CA24C*		13	16	19-1/2	N/A		17-1/2	23	36	47	25
CA24D*		13	16	19-1/2	N/A		19-1/2	25	40	53	20
CA30A*	30,000	13	16	19-1/2	N/A		15-1/2	20	31	41	25
CA30B*		13	16	19-1/2	N/A		17-1/2	23	36	47	25
CA30C*		13	16	19-1/2	N/A		19-1/2	25	40	53	20
CA30D*		13	16	19-1/2	N/A		21-1/2	28	45	58	16
CA30E*		13	16	19-1/2	N/A		21-1/2	30	47	60	16
CA36A*	36,000	13 for 2, 3R; 16 for 4R	16	19-1/2	N/A		17-1/2	23	36	47	25
CA36B*			16	19-1/2	N/A	19-1/2	25	40	53	20	
CA36C*			16	19-1/2	N/A	21-1/2	28	45	58	16	
CA36D*			16	19-1/2	N/A	23-1/2	31	49	64	12	
CA42A*	42,000	N/A	16	19-1/2	23	25-1/2	25	40	53	20	
CA42B*		N/A	16	19-1/2	23	21-1/2	28	45	58	16	
CA42C*		N/A	16	19-1/2	23	23-1/2	31	49	64	12	
CA42D*		N/A	16	19-1/2	23	25-1/2	34	54	70	12	
CA48A*	48,000	N/A	16	19-1/2	23	21-1/2	28	45	58	16	
CA48B*		N/A	16	19-1/2	23	23-1/2	31	49	64	12	
CA48C*		N/A	16	19-1/2	23	25-1/2	34	54	70	12	
CA48D*		N/A	16	19-1/2	23	27-1/2	37	58	76	12	
CA48F*		N/A	16	19-1/2	23	25-1/2	36	56	72	12	
CA48G*		N/A	16	19-1/2	23	27-1/2	39	60	78	12	
CA60A*		60,000	N/A	N/A	19-1/2	23	19-3/8	25-1/2	34	54	70
CA60B*	N/A		N/A	19-1/2	23	19-3/8	27-1/2	37	58	76	12
CA60C*	N/A		N/A	19-1/2 (2)	23 (2)	21-3/4	24-1/2	38	60	79	12
CA60D*	N/A		N/A	19-1/2 (2)	23 (2)	21-3/4	26-1/2	41	65	86	12
CA60E*	N/A		N/A	N/A	24 (3)	21	26-1/2	46	73	95	12
CA60F*	N/A		N/A	19-1/2	23	19-3/8	25-1/2	41	62	80	12
CA60G*	N/A		N/A	N/A	24 (3)	21	26-1/2	48	75	97	12

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CA Spec-2025-03

